



Spans for
Pentaglas 12mm and 16mm Panels
with Polycarbonate "U" Battens,
Grip-Lock

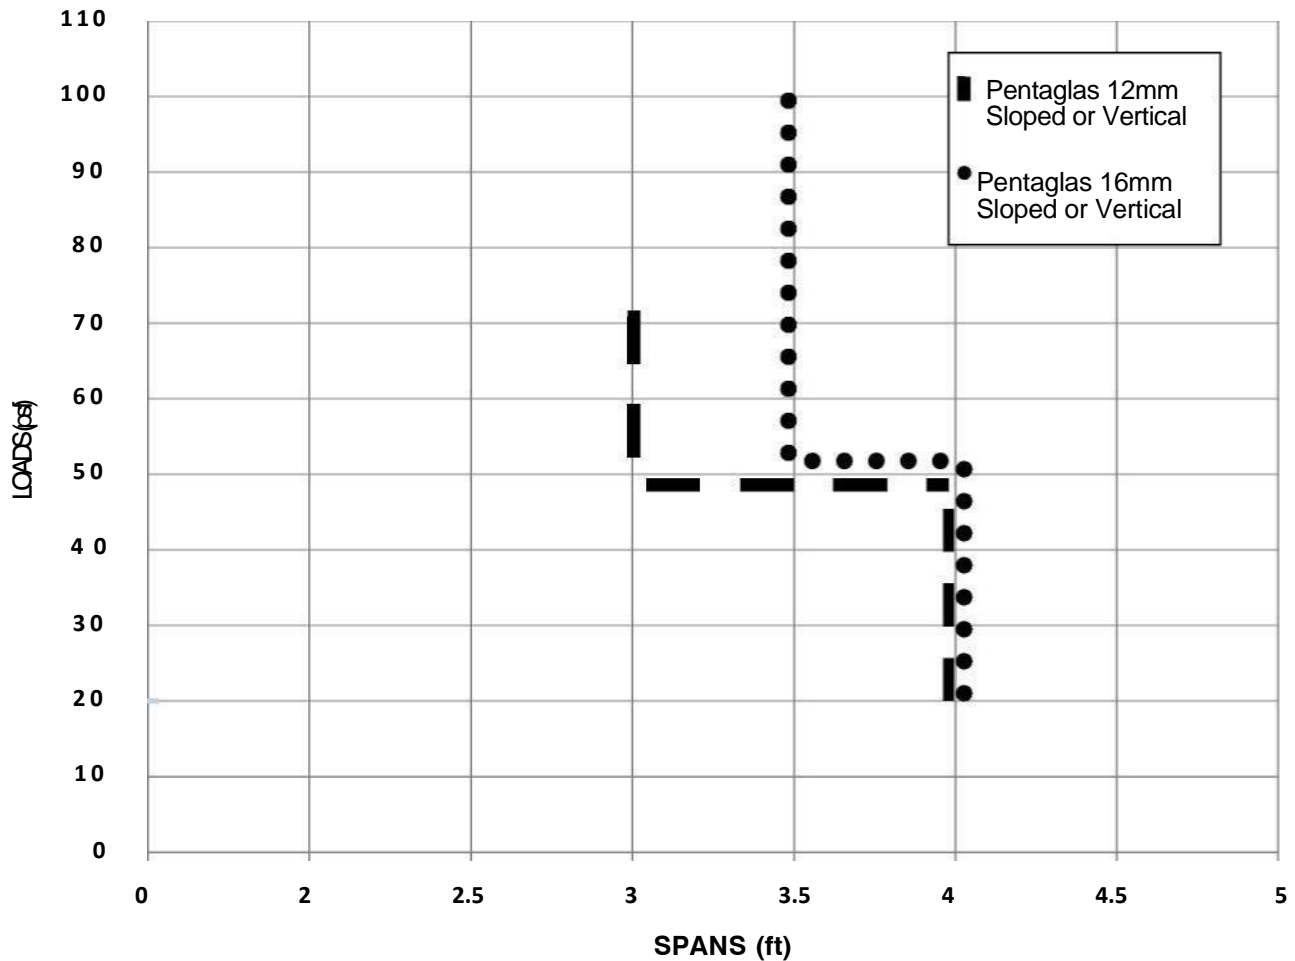

MINIMUM RECOMMENDED SLOPE IS 2:12


THIS CHART IS TO BE USED FOR PRELIMINARY DESIGN INFORMATION ONLY AND IT IS SUBJECTED TO FINAL DESIGN REVIEW. THIS CHART IS A GUIDELINE FOR BASIC SPANS OF THE SYSTEMS NOTED AND AVAILABLE. ALL SPANS ARE BASED ON A SIMPLE SINGLE SPAN CONDITION. MULTIPLE SPANS WILL HAVE DIFFERENT SPANNING CAPABILITIES. PLEASE CONTACT CPI FOR TECHNICAL SUPPORT IF REQUIRED.

Spans for
Pentaglas® **Quadwall 2.75"** Panels
with Polycarbonate **"U"** Battens, Grip-Lock

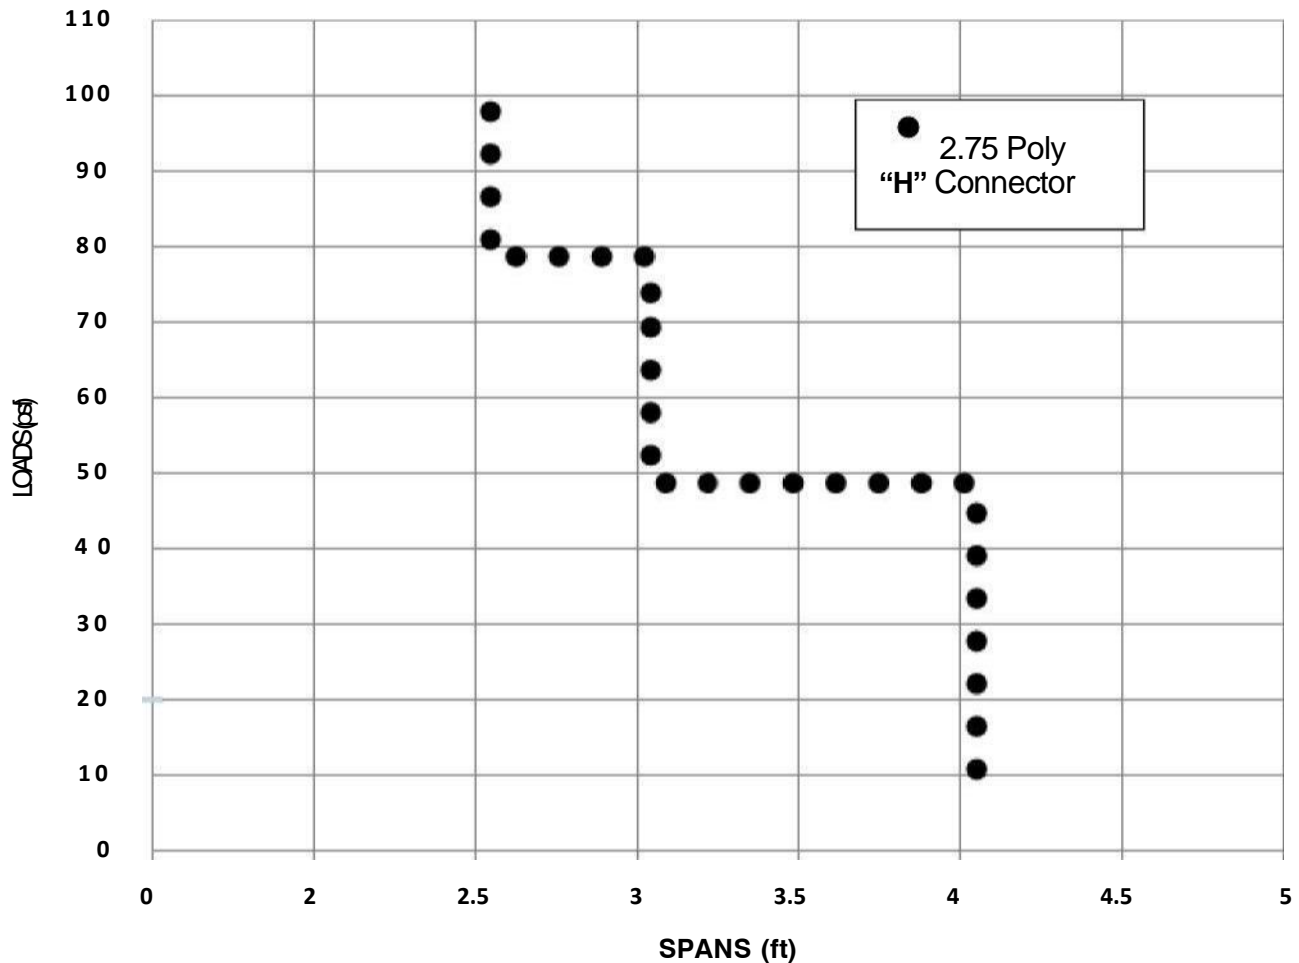


MINIMUM RECOMMENDED SLOPE IS 2:12

THIS CHART IS TO BE USED FOR PRELIMINARY DESIGN INFORMATION ONLY AND IT IS SUBJECTED TO FINAL DESIGN REVIEW. THIS CHART IS A GUIDELINE FOR BASIC SPANS OF THE SYSTEMS NOTED AND AVAILABLE. ALL SPANS ARE BASED ON A SIMPLE SINGLE SPAN CONDITION. MULTIPLE SPANS WILL HAVE DIFFERENT SPANNING CAPABILITIES. PLEASE CONTACT CPI FOR TECHNICAL SUPPORT IF REQUIRED.


	GUIDELINE LOADING CHART			
	Excellence In Translucent Daylighting			
	NO SCALE	REV.:	DATE: 8/11	SHEET: 1.10

Spans for
Quadwall® Glazing with Aluminum "H" Battens

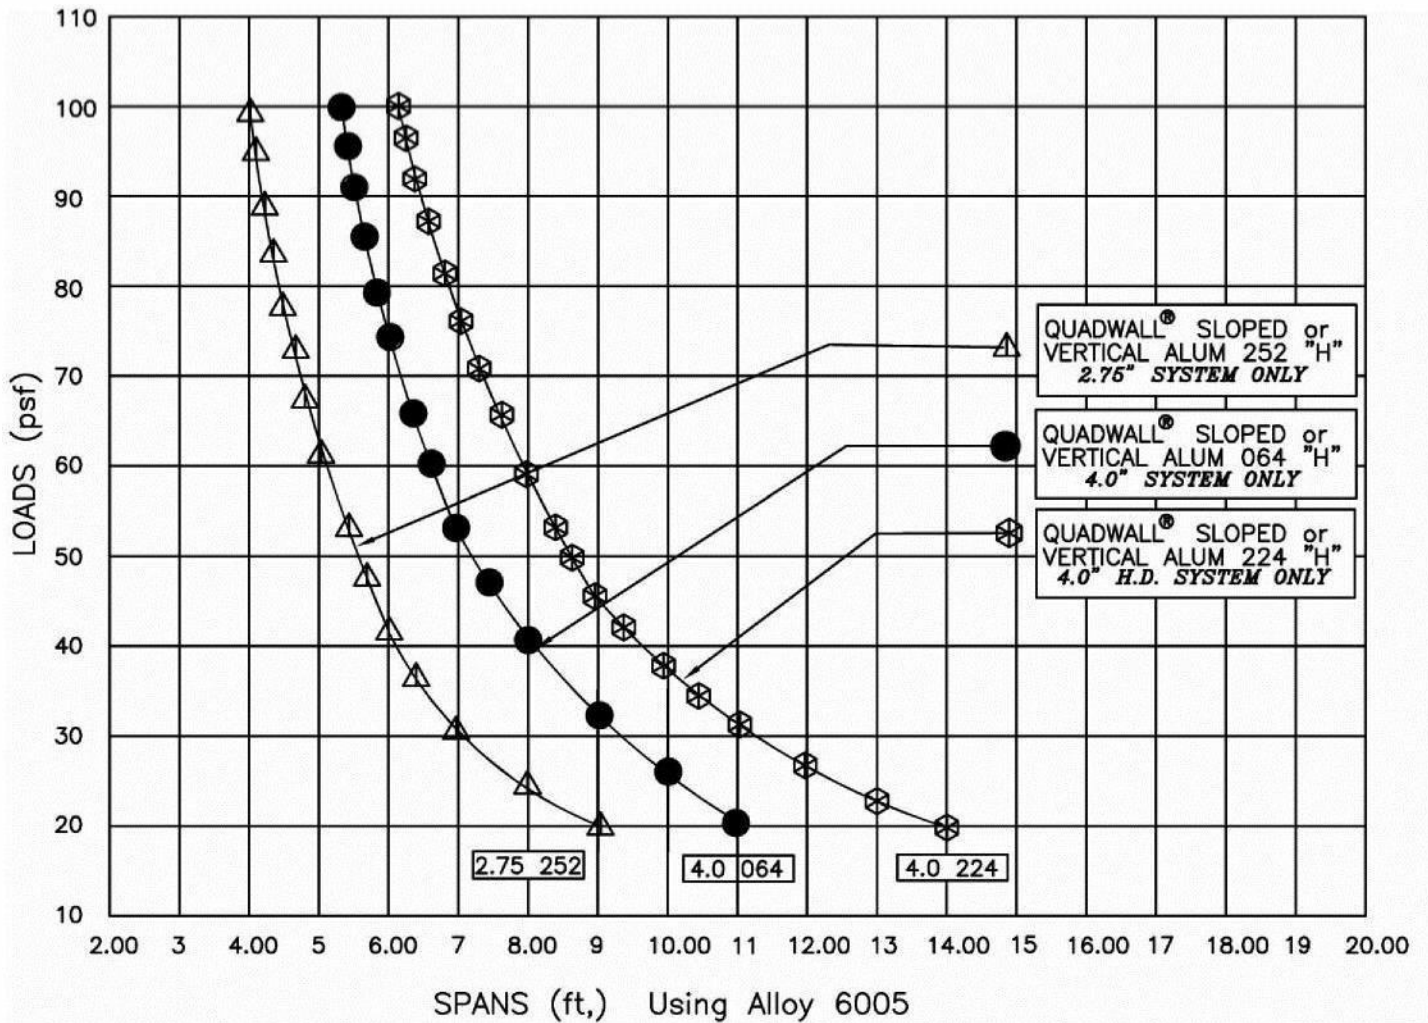

MINIMUM RECOMMENDED SLOPE IS 2:12

THIS CHART IS TO BE USED FOR PRELIMINARY DESIGN INFORMATION ONLY AND IT IS SUBJECT TO FINAL DESIGN REVIEW. THIS CHART IS A GUIDELINE FOR BASIC SINGLE SPAN CONDITION. MULTIPLE SPANS WILL HAVE DIFFERENT SPANNING CAPABILITIES SPANS OF THE SYSTEMS NOTED AND AVAILABLE. ALL SPANS ARE BASED ON A SIM. PLEASE CONTACT CPI FOR TECHNICAL SUPPORT IF REQUIRED.

	GUIDELINE LOADING CHART			
	Excellence In Translucent Daylighting			
	NO SCALE	REV.:	DATE: 8/11	SHEET: 1.10